

# STRIDE

## STRIDE CONNECTING RUBBER TILE

### DESCRIPTION

The STRIDE Connecting Rubber tiles are highly durable and tough. The extremely dense toplayer provides high impact protection to the sublayer and is easier to clean compared to other rubber surfaces or tiles. The tiles can be installed easily with the connectors system which comes with the tiles. This takes away the need for glueing.

---

<b>THICKNESS</b>	20mm
<b>WIDTH &amp; LENGTH</b>	20x1000x1000mm
<b>TOLERANCES</b>	Length and width +1,5%, thickness +-2mm
<b>COLOURS</b>	STONE Light Grey, 15% White, Pure Black

---

<b>THE SURFACE</b>	Cut from high density rubber roll flooring, EPDM
<b>THE BASE</b>	Made of recycled sport shoes and EPDM
<b>THE BOTTOM</b>	Full base design for shock absorption and impact sound. The full base consists of holes for the connector system. The tiles are produced in a single process which vulanizes the toplayer on the base in one step.

---

<b>DENSITY TOPLAYER</b>	Approx. 1.300kg/m <sup>3</sup>	<b>EU fire classification: Efl</b> <b>Compliance with content of pentachlorophenol</b> <b>Formaldehyde class: E1</b> <b>Thermal resistance: 0.16 m<sup>2</sup>. K/W</b>
<b>DENSITY SUBLAYER</b>	Approx. 1.100kg/m <sup>3</sup>	
<b>SHOCK ABSORPTION</b>	61% EN14808	
<b>VERTICAL DEFORMATION</b>	5.0mm EN14809	
<b>ANTISTATIC FLOOR COVERING</b>		
<b>DYNAMIC COEFFICIENT OF FRICTION: DRY-SLIP RESISTANCE</b>		


### INSTALLATION

The tiles can be installed easily using the connector system. There is no need to glue the tiles, however, glueing will provide the most durable result. Edges can be covered with our rubber profiles or by using aluminium profiles. Tiles can easily be cut with a cutter knife (Stanley, Wurth,...) and a cutting ruler. Optionally, you can order the STRIDE Installation DIY kit. Use a rubber hammer to close the joints on the connecting parts.


### CLEANING

The tiles have an extremely closed and dense surface. This surface makes the tiles easy to keep clean and maintain. Dust will not stick easily to the surface or get into the pores. Tiles can be kept clean by vacuuming and mopping the floor with the right equipment. It is also possible to use a cleaning machine with the right pads. Do not use any solvent-based cleaners but rather a PH neutral soap with warm water instead. After the first installation, use a degreaser to clean the surface. Optionally, you can buy the right cleaning soap from STRIDE.

## STRIDE Connecting Rubber Tile | 70% Grey

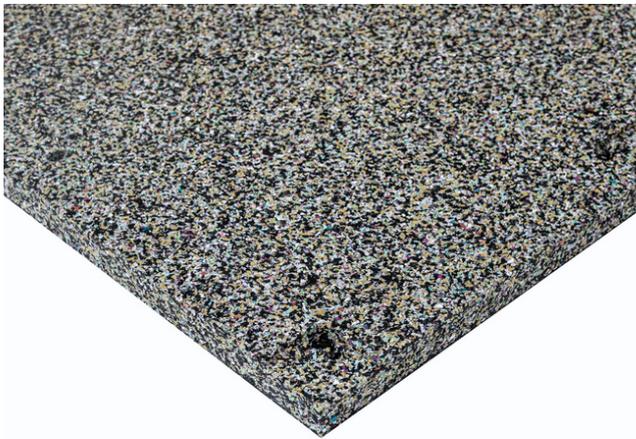

## STRIDE Connecting Rubber Tile | 15% White

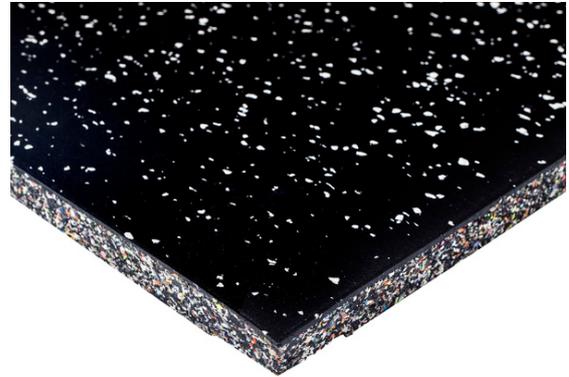

## STRIDE Connecting Rubber Tile | Pure Black

